




## JT FALCON 3.5 SHOCK WIRING INSTALL

[www.falconshocks.com](http://www.falconshocks.com)

# 59-09-06-001

# 59-09-06-002

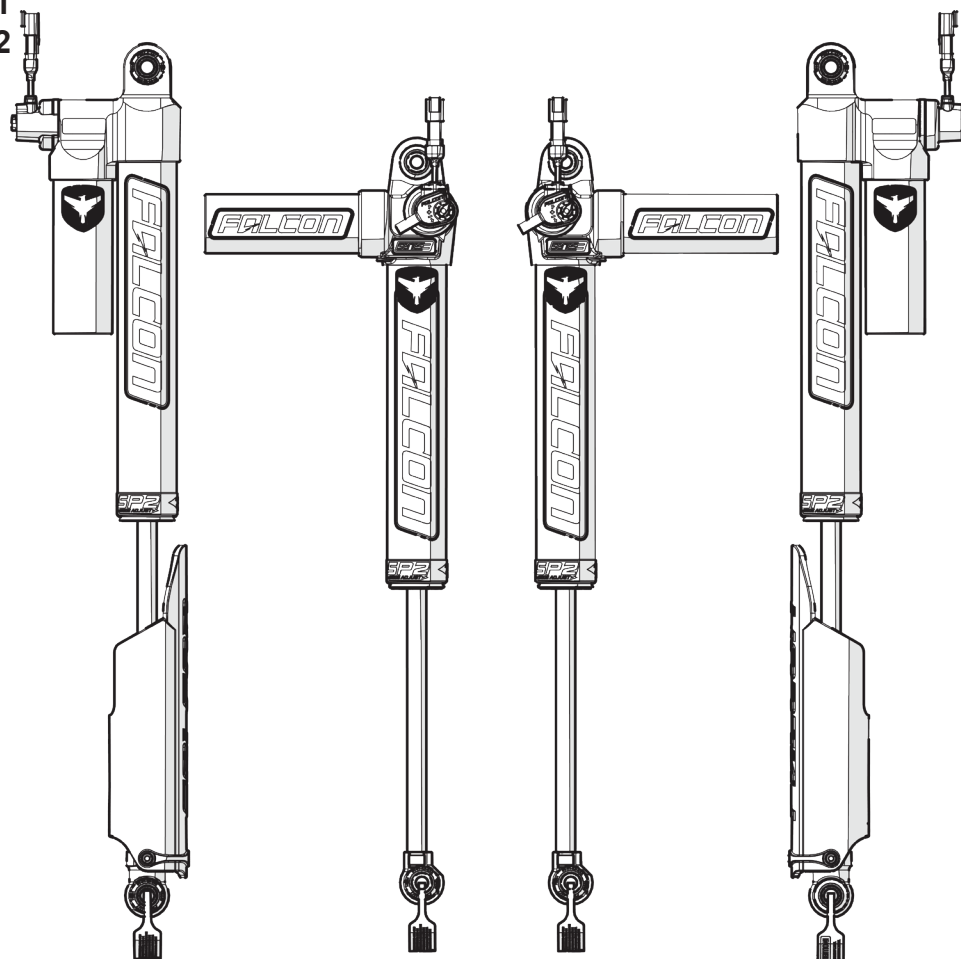

### Important Notes:


Prior to beginning this install, or any installation, read the instructions thoroughly to familiarize yourself with the required steps. Evaluate if you are experienced and capable to personally perform these modifications. A factory service manual should be used in conjunction with these installation instructions.

Refer to the parts list to ensure that all necessary components and hardware has been included. If any parts are missing please contact your local TeraFlex dealer for assistance.

**When reinstalling OEM hardware, refer to the torque specs given in the Factory Service Manual.**

#### Tools Needed:


- Metric Sockets and Open End Wrenches
- Torque Wrench
- Factory Service Manual
- General Mechanics Tools

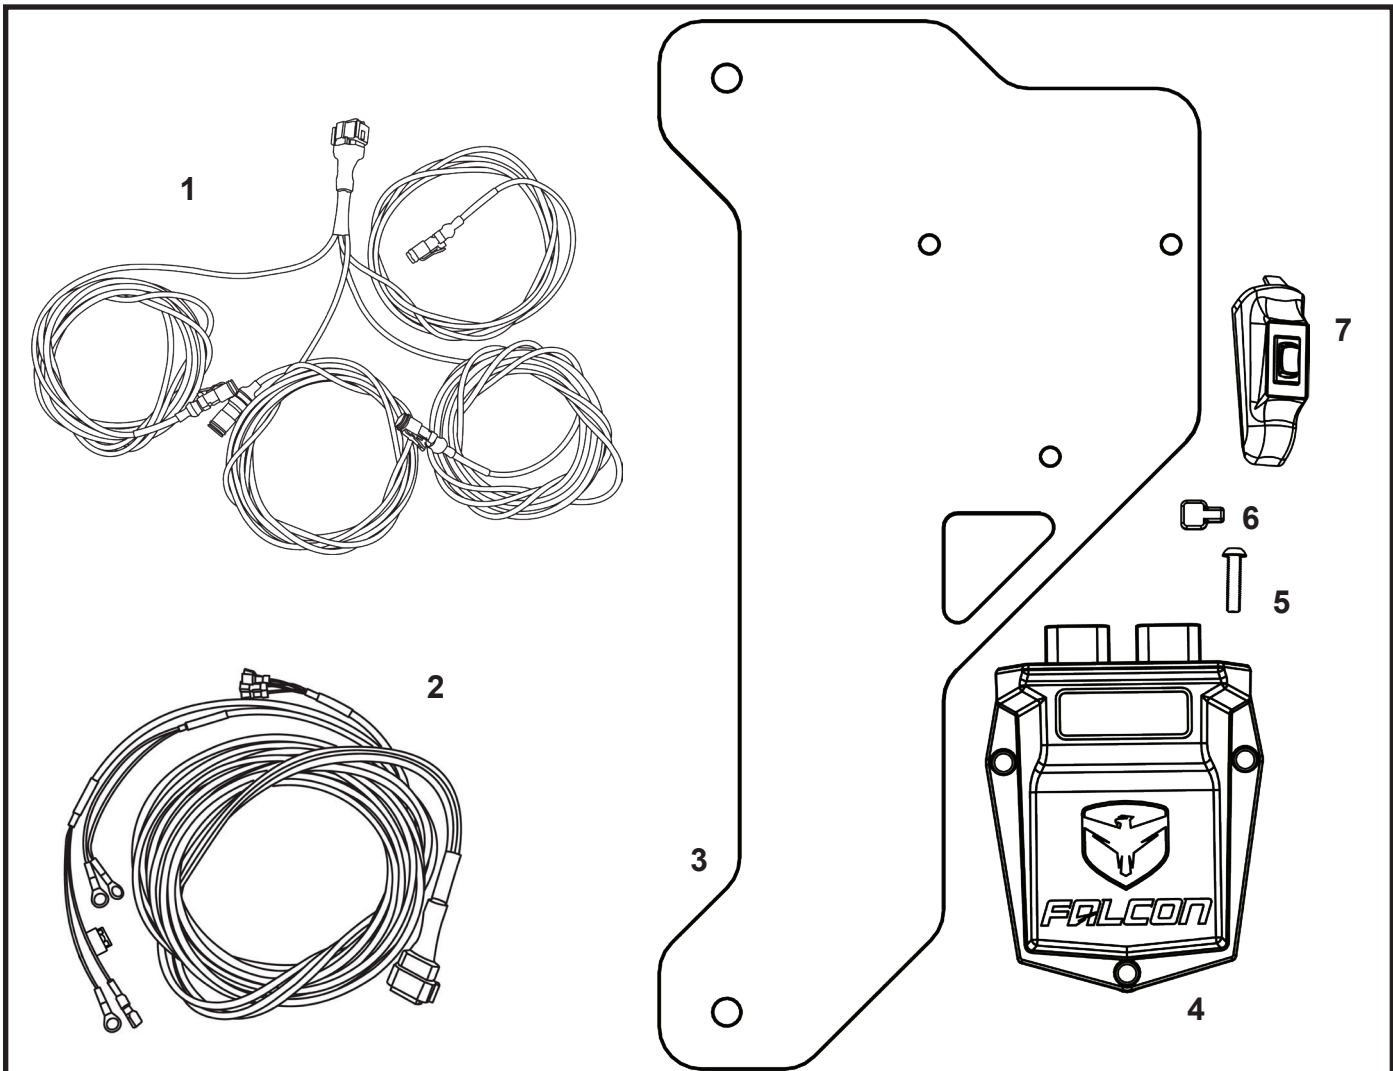

Item #	Part No.	Description	QTY
	<b>59-09-06-001</b>	<b>aDAPT Kit</b>	
1	59-09-03-001	Shock Wire Harness, E-Adj / aDAPT (Jeep)	1
2	59-09-03-002	Power Wire Harness, E-Adj / aDAPT (Jeep)	1
3	59-10-02-001	PCB Board, Mounting Bracket, JL/JT	1
4	59-10-01-405	PCB, 1 Solenoid / Shock, aDAPT Assembly W/ Enclosure	1
5	45-05-002-004	Button Socket Cap Screw, M6 x 1.0 x 25mm	3
6	59-03-01-001	Scotchlok, T-Tap, 18-14 AWG / Blue	1
7	59-02-05-003	Switch, Grab Handle Mounted, Firm-Auto-Soft Assembly	1
	<b>59-09-06-002</b>	<b>E-Adjust Kit</b>	
1	59-09-03-001	Shock Wire Harness, E-Adj / aDAPT (Jeep)	1
2	59-09-03-002	Power Wire Harness, E-Adj / aDAPT (Jeep)	1
3	59-10-02-001	PCB Board, Mounting Bracket, JL/JT	1
4	59-10-01-305	PCB, 1 Solenoid / Shock, On/Off Assembly W/ Enclosure	1
5	45-05-002-004	Button Socket Cap Screw, M6 x 1.0 x 25mm	3
6	59-03-01-001	Scotchlok, T-Tap, 18-14 AWG / Blue	1
7	59-02-05-002	Switch, Grab Handle Mounted, On-Off Assembly	1



## JL FALCON 3.5 NON-aDAPT HARNESS ONLY

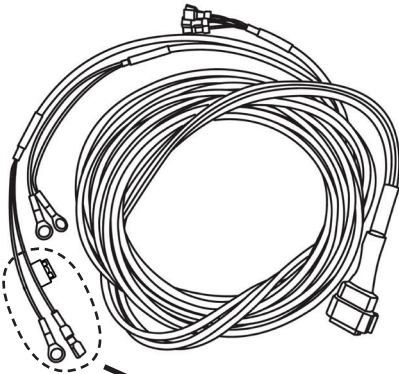

#59-08-01-006  
HEAT SHRINK



**BLACK WIRE**


**CUT THE GROUND WIRE**

**1**



**BLACK WIRE**


#59-08-01-006

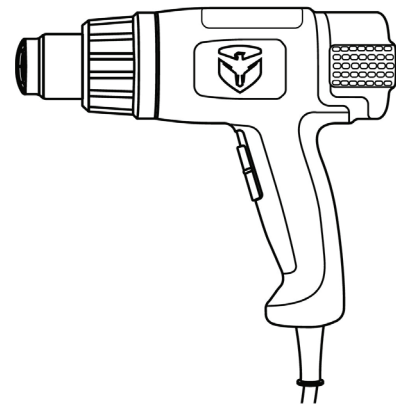

**PLACE HEAT SHRINK CAP  
ONTO BLACK WIRE**


**2**

**REMOVE THE TWO BOLTS FROM THE BACK OF THE DRIVERS SEAT**

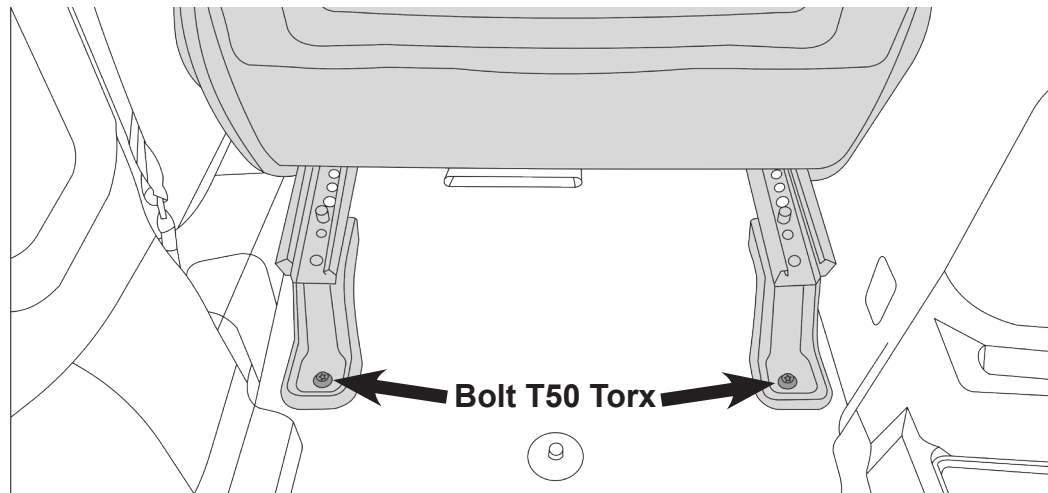


**1**

**INSTALL THE PCB BOARD TO THE MOUNTING PLATE**

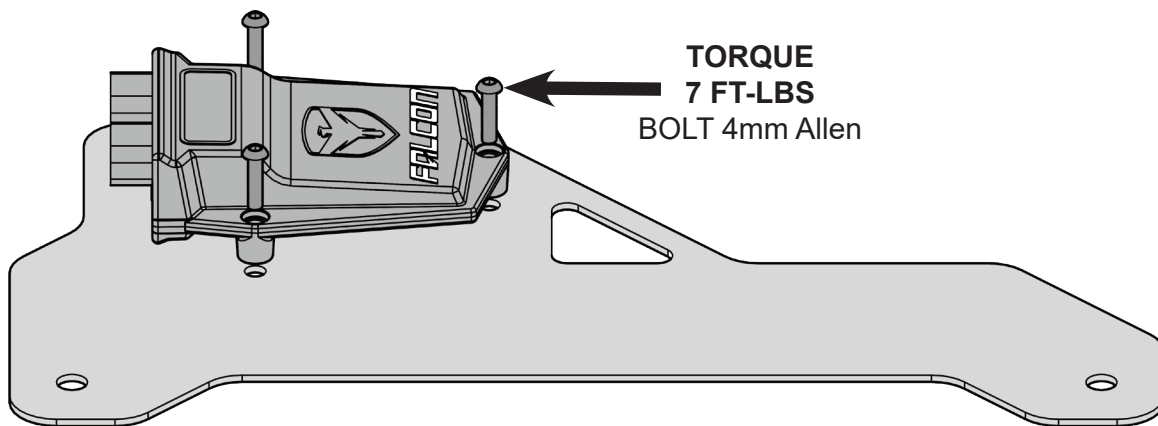

**2**


**INSTALL THE CONTROL MODULE UNDER THE DRIVER SEAT AND REINSTALL SEAT BOLTS**

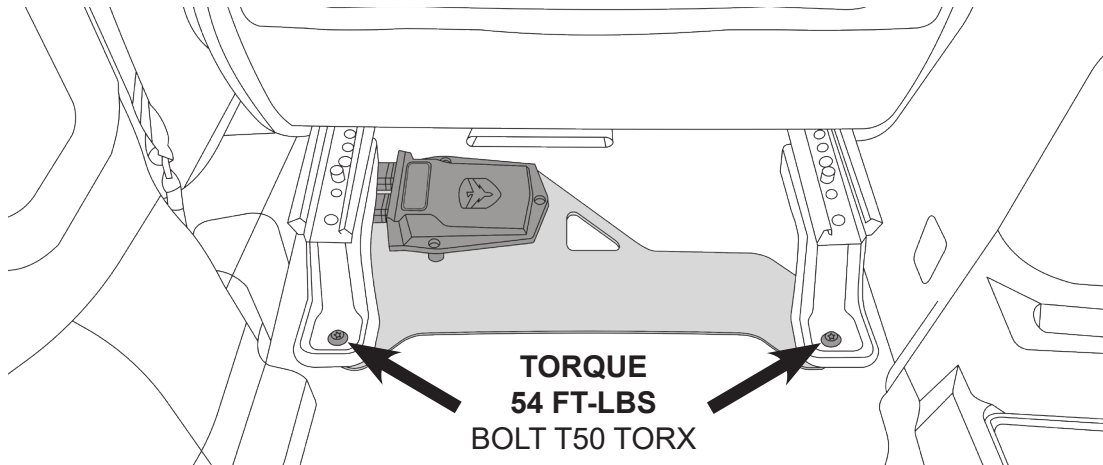


**3**



**LIFT THE CARPET UNDER THE DRIVER SEAT TO EXPOSE THE DRAIN PLUG  
CUT A SLIT INTO THE DRAIN PLUG**

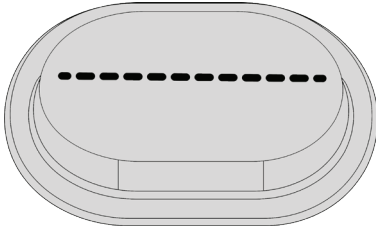


**UNDER THE REAR BENCH  
BEHIND THE DRIVERS  
SEAT LIFT THE CARPET  
AND CUT A SLIT INTO THE  
DRAIN PLUG**

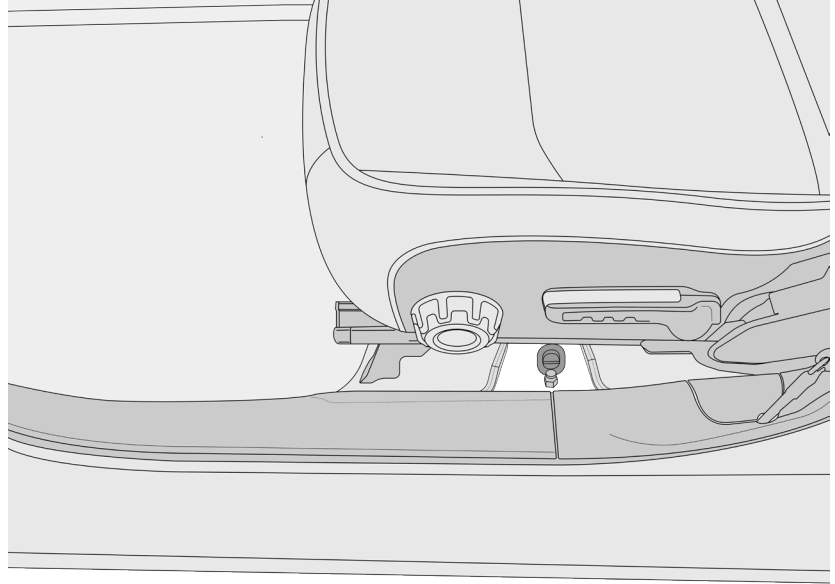**4**

**CONNECT THE CABLES TO THE CONTROL MODULE AND ROUTE ALL THE LINES**

**NOTE:  
(MANUAL TRANS ONLY)  
YOU WILL NEED TO RUN  
ALL 4 SHOCK LINES  
AND BATTERY CABLES  
THROUGH THIS PLUG**

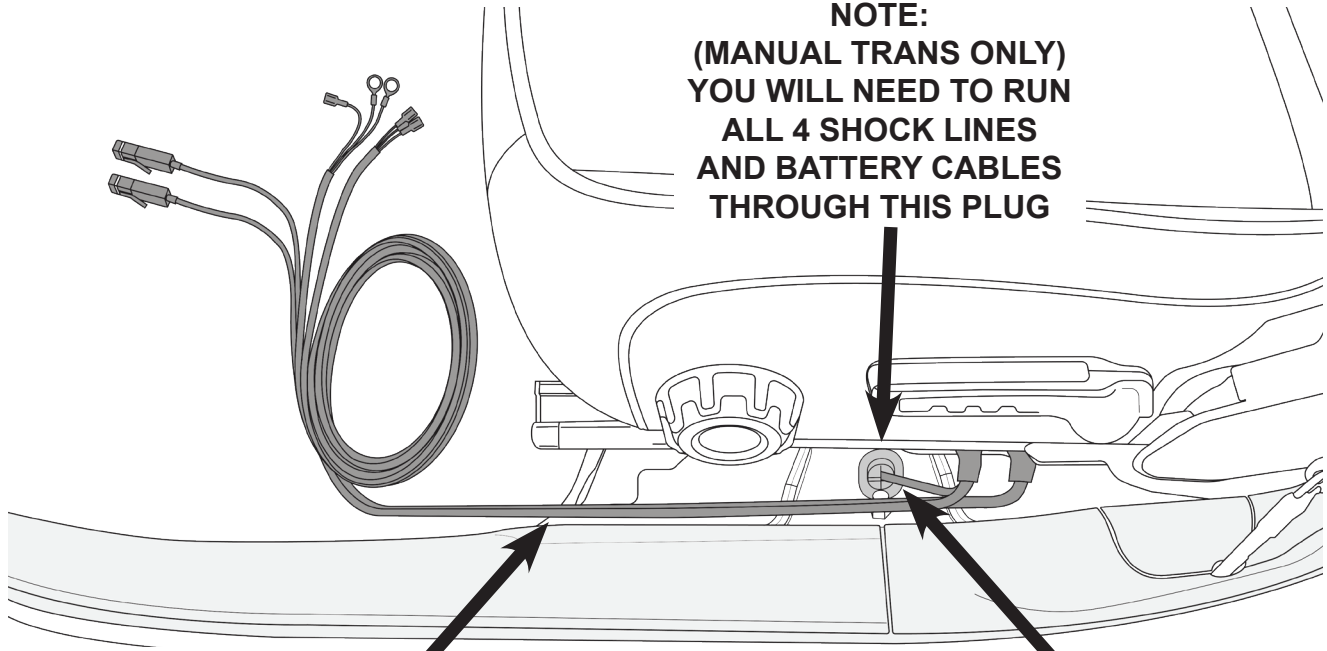


**ROUTE THE FRONT SHOCK LINES,  
BATTERY CABLES, AND SWITCH  
LINES TO THE FRONT OF THE JEEP  
UNDER THE DOOR TRIM**

**ROUTE THE REAR SHOCK  
LINES THROUGH THE DRAIN  
PLUG**

**5**


## RUN THE REAR SHOCK LINES ALONG THE FRAME TO THE BACK OF THE JEEP

**NOTE:**  
(MANUAL TRANS ONLY)  
RUN THE FRONT SHOCK  
LINES AND BATTERY  
CABLES TO THE FRONT  
OF THE JEEP

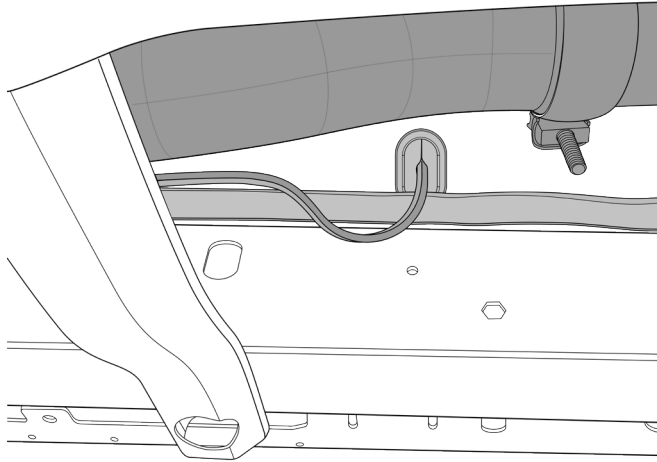



6

## RUN THE SHOCK LINES TO THE REAR SHOCKS

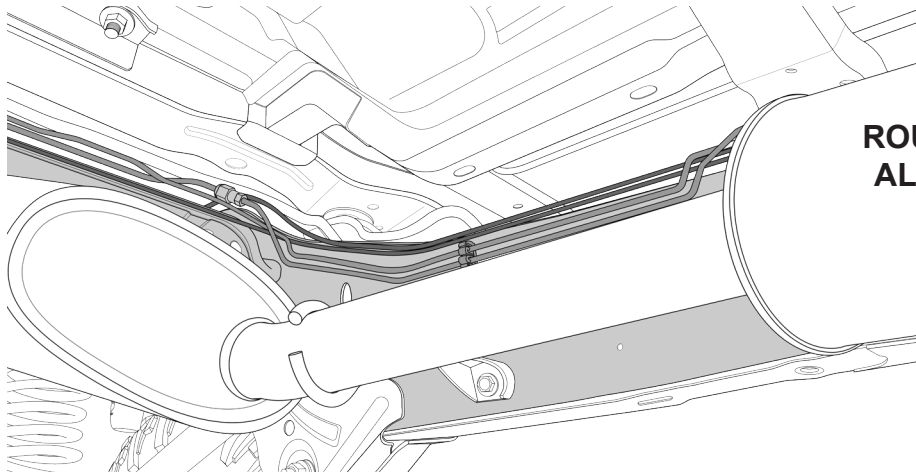

**ROUTE THE SHOCK LINES  
ALONG THE FRAME AND  
CROSS MEMBER**

**AVOID THE EXHAUST  
AND ANY PINCH POINTS.  
SECURE WITH ZIP TIES.**


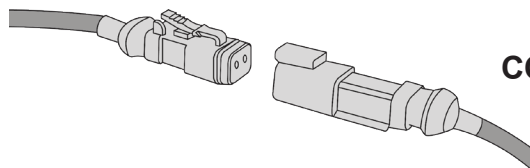
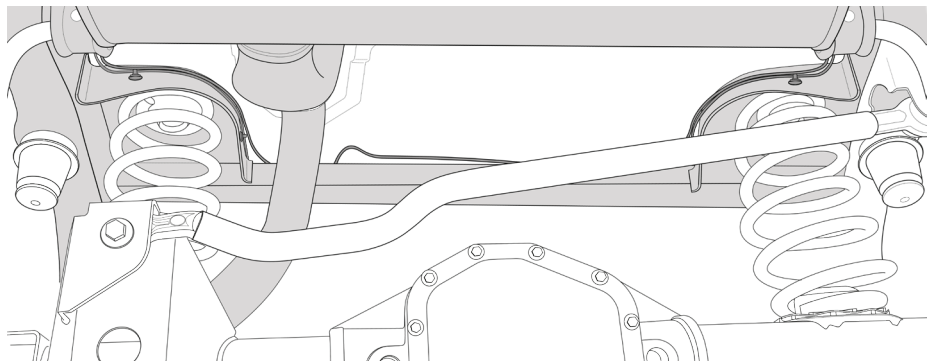


**CONNECT THE REAR  
SHOCKS**

7

**REMOVE AND MODIFY FIRE WALL PLUG BEHIND PEDALS**

**AFTER REMOVAL, DRILL  
A HOLE IN THE  
CENTER OF THE PLUG  
BIG ENOUGH TO FIT  
BOTH FRONT SHOCK  
LINES AND THE BATTERY  
CABLES THROUGH**

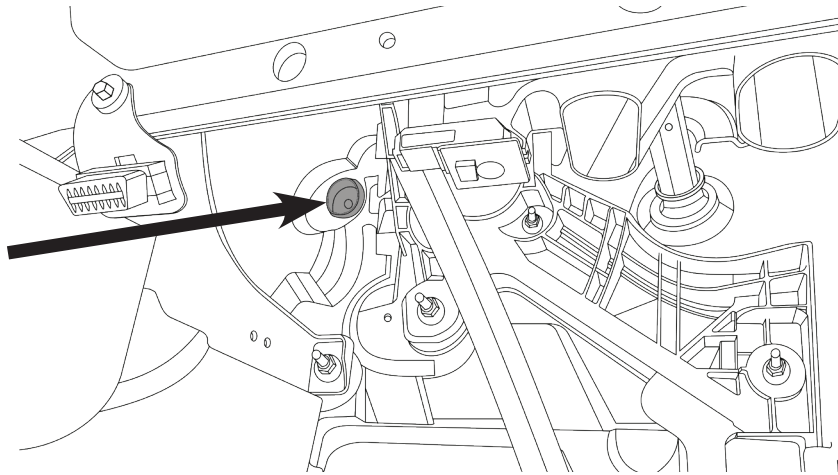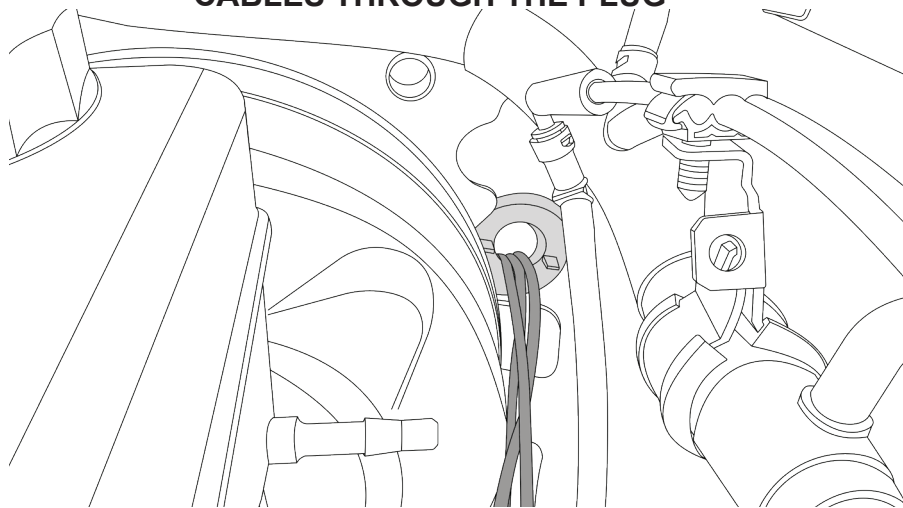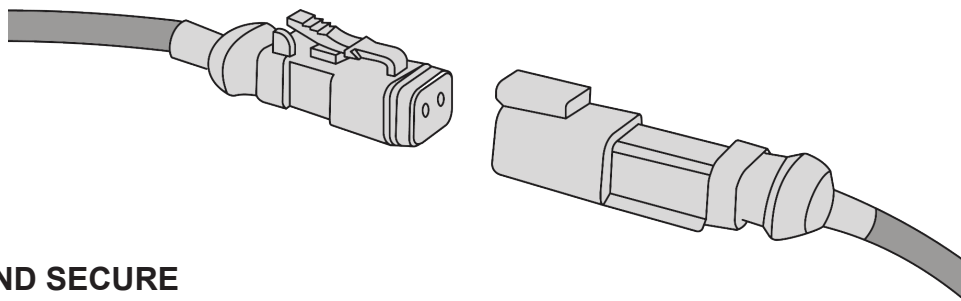
**8****REINSTALL FIRE WALL PLUG AND RUN THE FRONT SHOCK LINES AND BATTERY CABLES THROUGH THE PLUG****9****CONNECT TO THE FRONT LEFT SHOCK**

**TIE OFF AND SECURE  
ANY EXTRA WIRING**

**10**

**ROUTE THE FRONT RIGHT SHOCK LINE AND BATTERY CABLES ACROSS THE ENGINE**


**USE ZIP TIES TO SECURE  
THE CABLES**

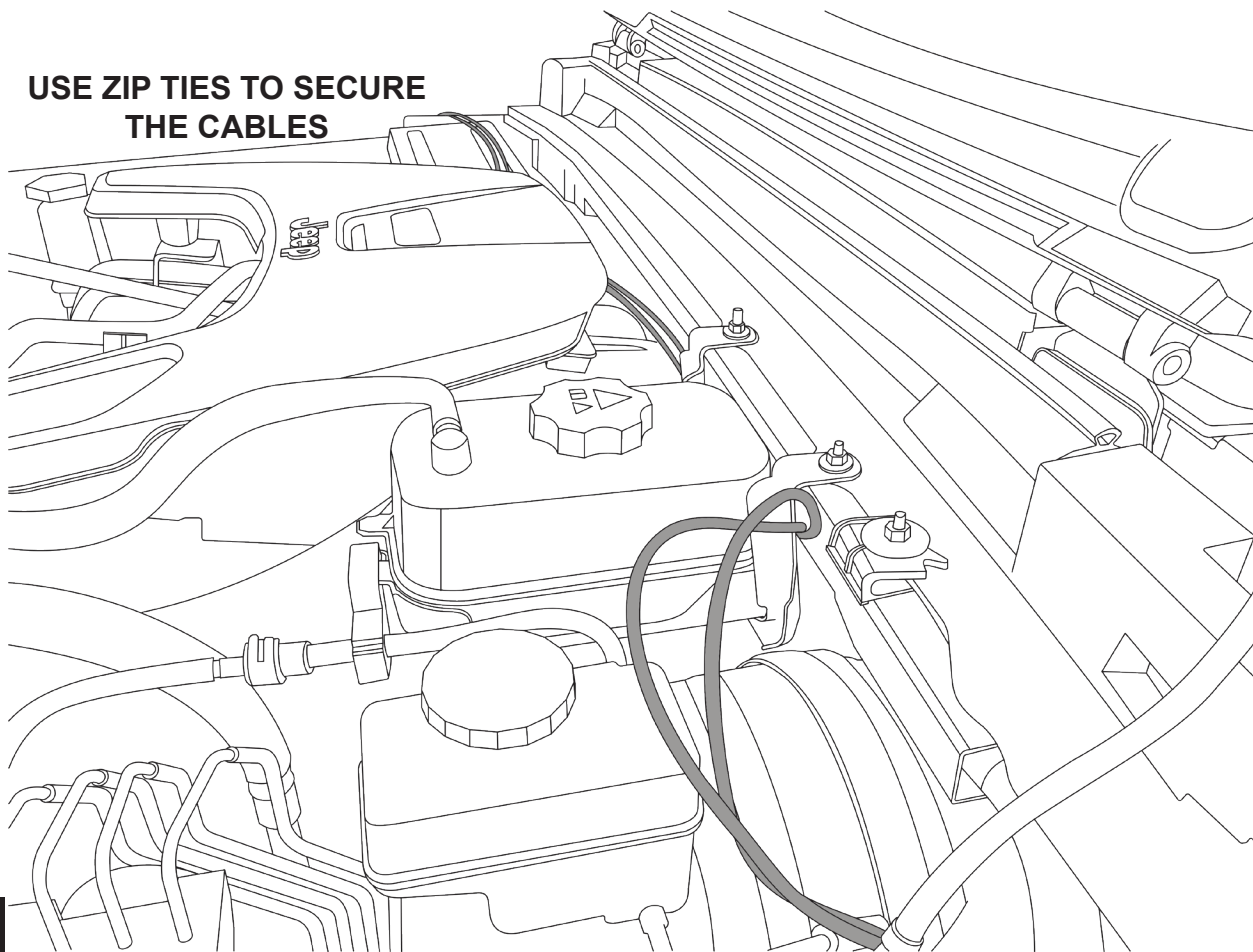

**11**

**CONNECT TO THE FRONT RIGHT SHOCK**


**TIE OFF AND SECURE  
ANY EXTRA WIRING**

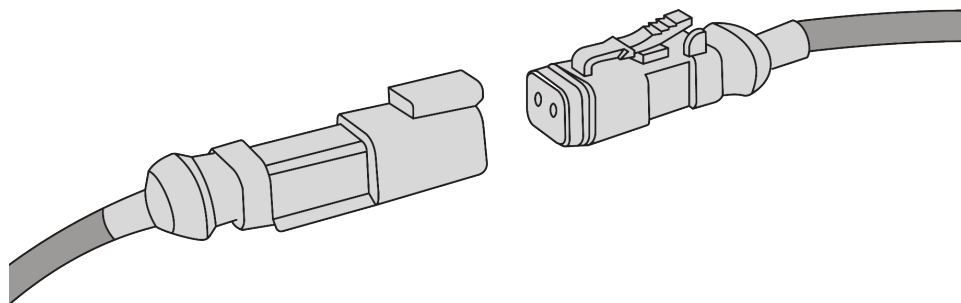

**12**

## CONNECT BATTERY CABLES TO THE BATTERY


**TIE OFF AND SECURE  
ANY EXTRA WIRING**

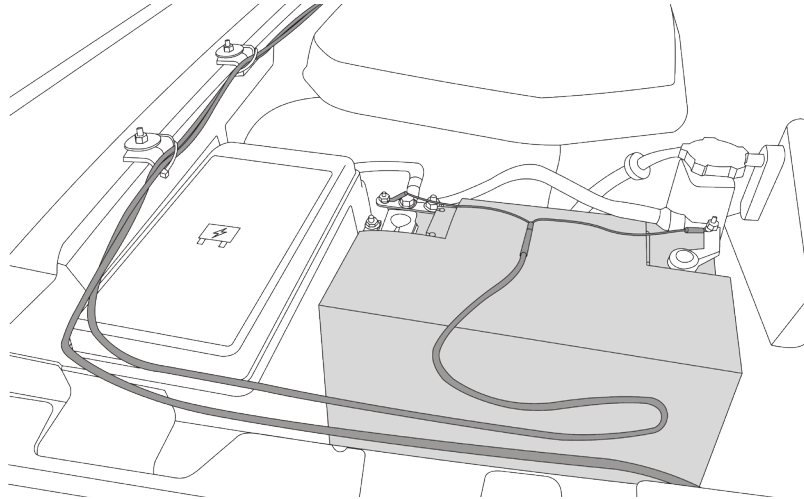

**13**

## REMOVE DRIVER GRAB HANDLE AND SIDE TRIM PANEL


**REMOVE  
AND  
DISCARD  
TOP COVER**

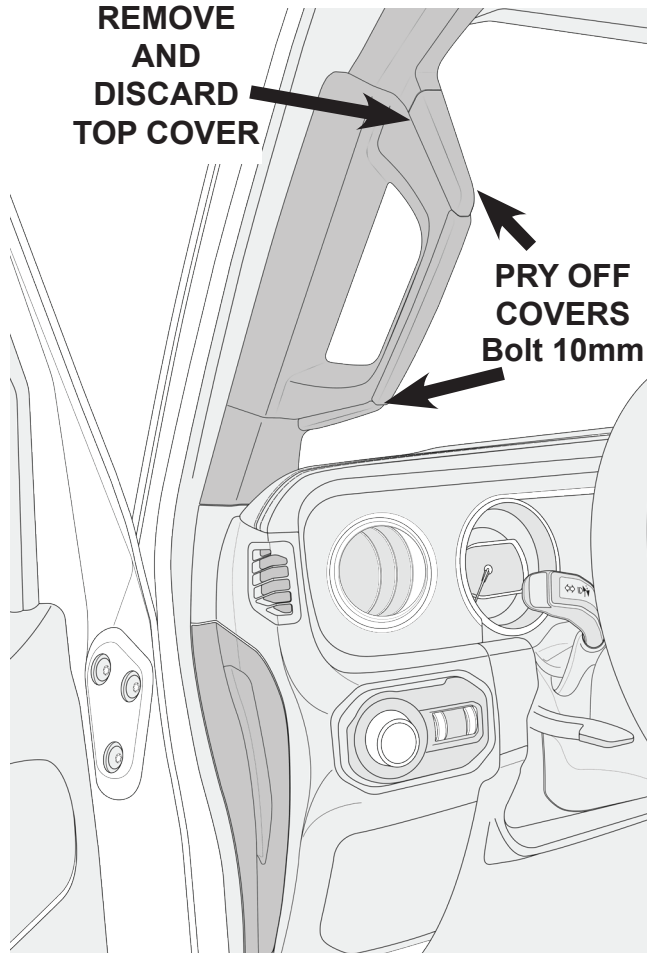

**14**


## MODIFY THE DRIVER GRAB HANDLE

**CAREFULLY  
MARK AND DRILL  
A HOLE INSIDE  
THE TOP OF THE  
HANDLE (FROM  
THE FRONT TO  
THE BACK) FOR  
THE SWITCH  
CABLE**

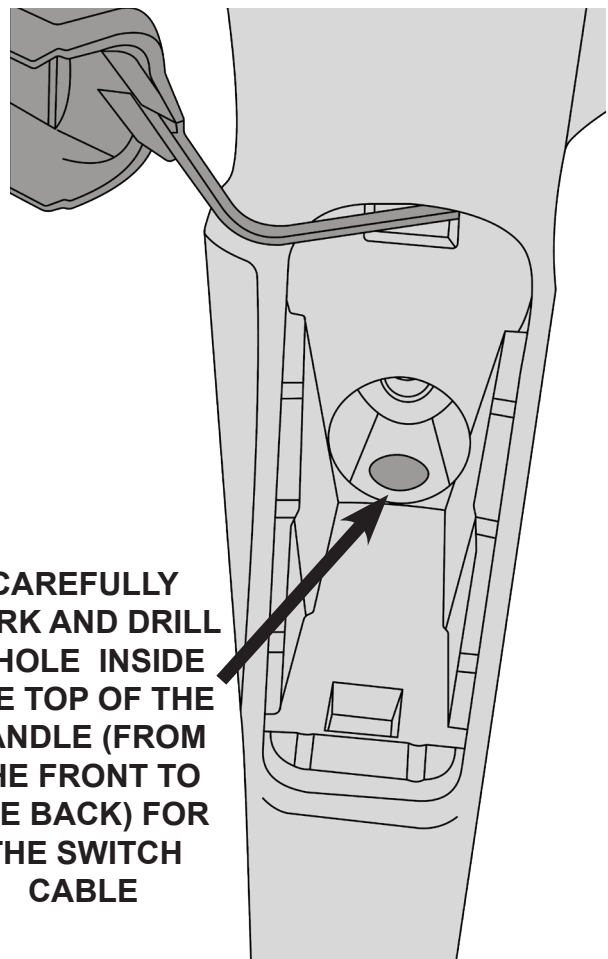

**15**


**RUN THE SWITCH CABLE UP TO THE HANDLE  
RUN CABLE THROUGH HANDLE AND THEN REINSTALL THE HANDLE**

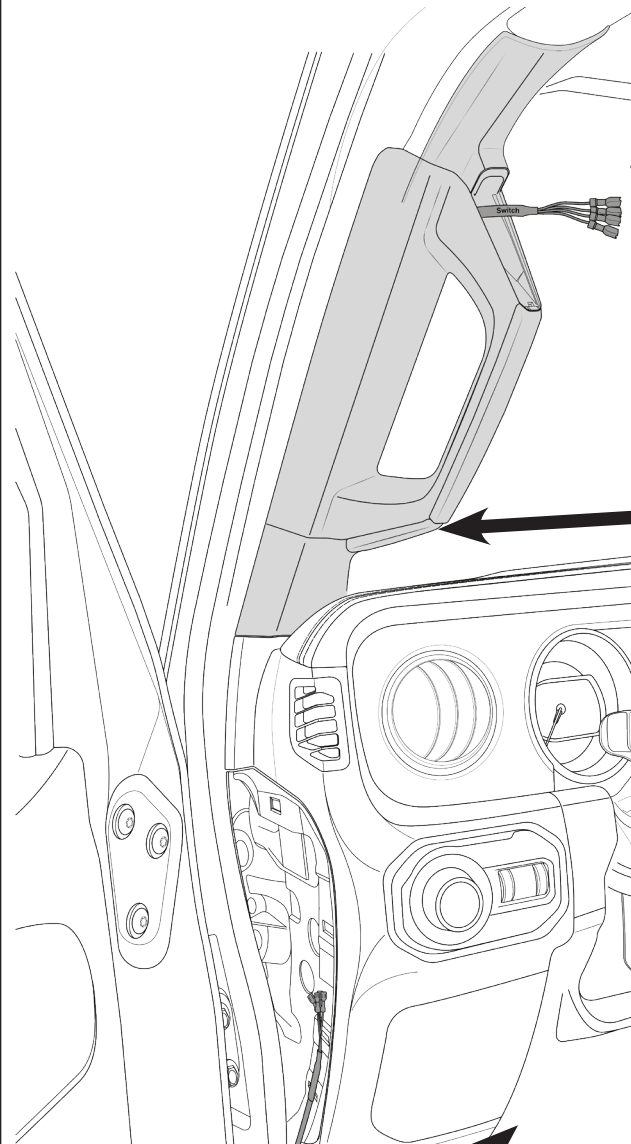


**INSTALL THE SWITCH  
USING THE PROVIDED  
WIRING GUIDE**

**TORQUE  
80 IN-LBS  
BOLT 10mm Hex**

**aDAPT**

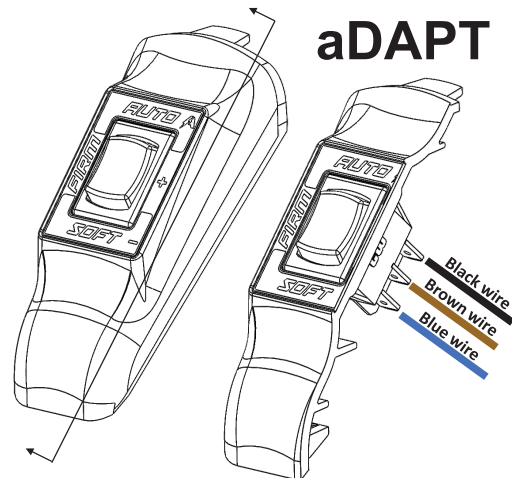


**RUN THE SWITCH CABLE UP  
TO THE HANDLE.  
RUN THE KEY ON POWER  
CABLE ACROSS THE  
STEERING WHEEL BEHIND  
THE KNEE BOLSTER PLATE**

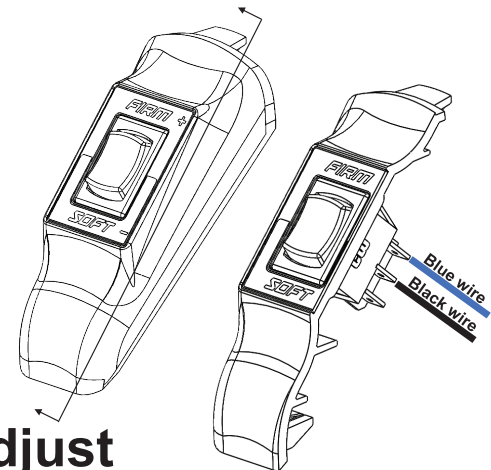

**e-Adjust**



## REMOVE TOP SECTION OF CENTER CONSOLE

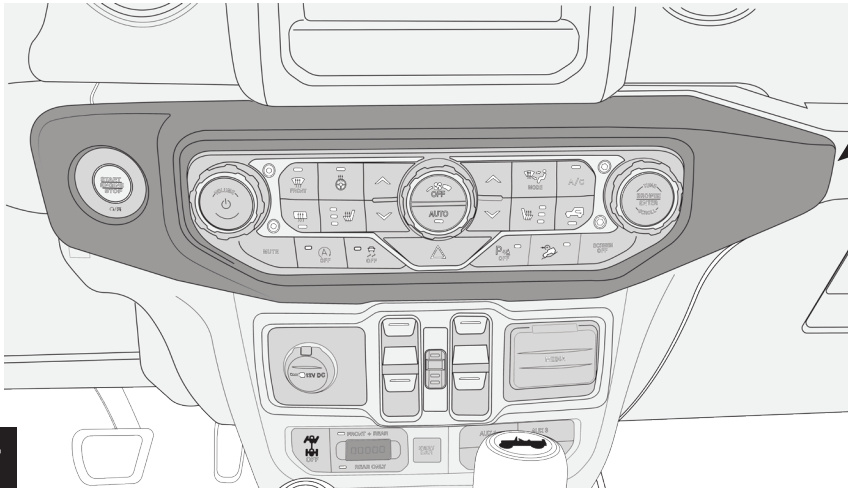


CAREFULLY PRY OFF

DISCONNECT ANY  
ELECTRICAL  
CONNECTIONS

17


## OPEN LOWER SECTION OF CENTER CONSOLE

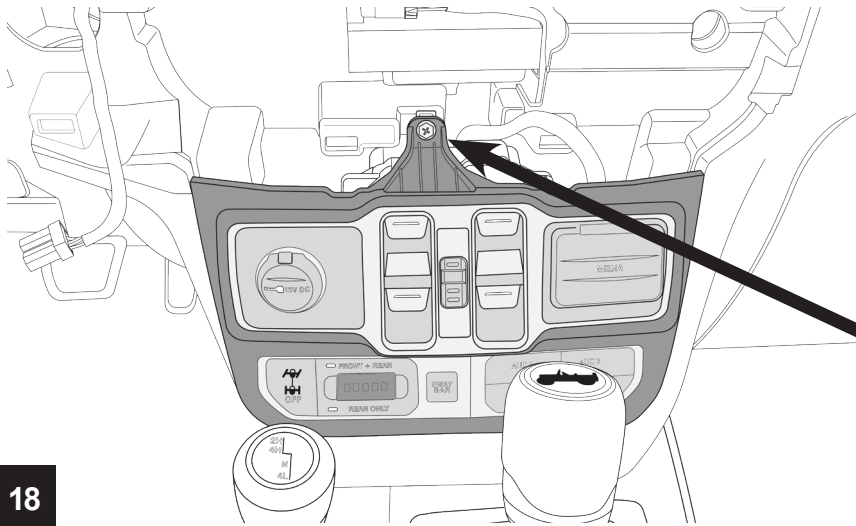

SCREW 7mm

18

## CLAMP ONTO THE KEY-ON-POWER LINE FROM THE BACK OF THE OUTLET

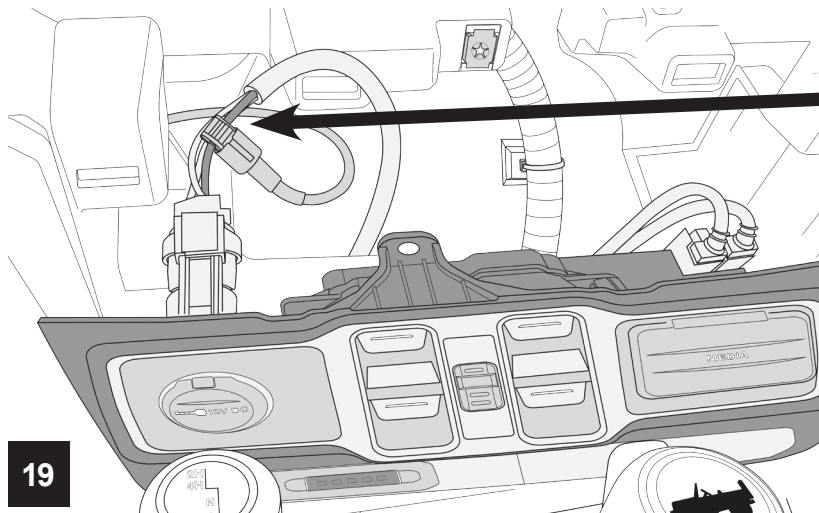

CLAMP THE T-PIN  
CONNECTOR ONTO THE PINK/  
YELLOW WIRE. ATTACH THE  
RED POWER LINE TO THE  
T-PIN.

REASSEMBLE THE CENTER  
CONSOLE

19





## PRODUCT INFORMATION

### MAINTENANCE INFORMATION:

It is the buyer's responsibility to have all suspension, drivetrain, steering, and other components checked for proper tightness and torque after the first 100 miles and every 3000 miles after that.

### NOTICE TO INSTALLER:

The enclosed "Warning to Driver" sticker must be installed in the vehicle in driver's view. This sticker is to act as a constant safety reminder when operating the vehicle. It is your responsibility as the equipment installer to install the provided sticker and to forward the product instructions to the vehicle's owner for review. If a "Warning to Driver" sticker or product installation guide were not included in the kit, FREE replacement stickers and instructions are available by request. It is the installer's duty to ensure a safe and controllable vehicle after the modifications have been performed.

### WARNING:

Neither the seller nor the manufacturer will be liable for any loss, damage, or injury directly or indirectly arising from the use of or inability to determine the use of these products. Before using, the user shall determine the suitability of the products for its intended use, and the user shall assume all responsibility and risk in connection therewith.

### WARNING TO DRIVER:

This vehicle has been modified to enhance off road performance and has unique handling characteristics. Use in harsh environments can cause extreme stress on the components. Vehicle should be inspected after being off road to make sure that all the components are in working order and safe to travel on the highway. All fasteners should be checked so that they are at the correct torque specifications as the vibration and stresses from off roading may cause critical fasteners to work loose. Extra care should be taken to inspect the critical components, steering, and brake systems. During each oil change components such as arms, tie rod ends, etc should be greased and checked for excessive wear. Any worn components should be replaced. When returning to the pavement always set or restore tire air pressure to the factory recommendation and connect or engage any disabled sway bar mechanisms. Because of the higher center of gravity and larger tires, this vehicle handles and reacts differently than many passenger cars, both on and off road. You must drive it safely! Extreme care should be taken to prevent vehicle rollover or loss of control, which can result in serious injury or death. Avoid sudden sharp turns or abrupt maneuvers. Generally, braking performance and capabilities are decreased when significantly larger/heavier tires are used, especially when used in combination with transfer case low-range reduction kits. Take this into consideration while driving. Do not add, alter or fabricate any factory or aftermarket parts to increase vehicle height over the intended height of the TeraFlex product purchased. Mixing component brand is not recommended. TeraFlex Inc. will not be responsible for any altered product or any improper installation or use of our products. We will be happy to answer any questions concerning the design, function, and correct use of our products. It is ultimately the buyer's responsibility to have all bolts/nuts checked for tightness after the first 100 miles and then every 3000 miles. Wheel alignment, steering system, suspension and drive line systems must be inspected by a qualified professional mechanic at least every 3000 miles.

### TERAFLEX PRODUCT WARRANTY:

TeraFlex Inc. warrants TeraFlex Suspension products to the original retail purchaser to be free of defects in material and workmanship for as long as the original purchaser owns the vehicle on which products were originally installed.

Failure to complete regular maintenance (grease every 3000 miles) on TeraFlex FlexArms will void this warranty. All other conditions of the standard TeraFlex product warranty apply.

All TeraLow products are covered by the TeraFlex two (2) year warranty to be free of defects in material and workmanship for two years from date purchased.

TeraFlex axles are covered by a 12-month warranty to be free of defects in materials and workmanship.

This warranty does not cover or include product finish, improperly installed or applied products, improperly maintained products, products or components used for racing or competition or damage due to abuse or neglect, products that fail due to the use of larger tire and wheel combinations.

All returns must be accompanied by an original invoice. It is the customer's responsibility to remove the product from the vehicle. Shipping charges are the responsibility of the customer. TeraFlex Inc. will pay the return freight if the product meets the terms of warranty.

This warranty is for the replacement or repair of defective TeraFlex products only and does not include freight charges, labor charges for removal of or installation of TeraFlex or related products or components, costs incurred due to down time of the vehicle, or lost profits due to vehicle down time.

A returned goods authorization number (RGA#) must accompany any returned products. For more information please contact a TeraFlex customer service representative.

### COPYRIGHT

©Copyright 2014. All rights reserved, TeraFlex Inc. Reproduction of this catalog and/or any of its contents without written permission is strictly prohibited.

TeraFlex® is a registered trademark of TeraFlex Inc. All trade names and logos including but not limited to TeraFlex, FlexArms, RockGuard, Monster, and LCG are protected by law and duplication of trade names and/or logos are strictly prohibited.

TeraFlex Inc. reserves the right to update, discontinue, redesign, modify finish, part number or component build parts if deemed necessary without written notice. TeraFlex Inc., and any associated dealers are not responsible for misprints or typographical errors that may have inadvertently been made within this instruction sheet.

Jeep® and the Jeep® grill are registered trademarks of Fiat Chrysler Automobiles N.V., and have no affiliation with TeraFlex Inc.

### **TERAFLEX**, Inc.

5680 West Dannon Way  
West Jordan, UT. 84081  
Phone/801.713.3314  
Fax/801.713.2313  
www.teraflex.com